

Time Sensitive Information!

These Configuration Changes Must Be Applied
Ten Days Prior to Norcom Solutions Group
Cut-Over

Cradlepoint IBR600 Router Configuration
For Norcom Solutions Group Cloud Telephony
Deployment
Document Version 1.0

March 1, 2018

Table of Contents

1. Introduction
2. Firewall Verification Checklist
3. Disable SIP ALG
4. Create Traffic Shaper & Priority

Read Me!

1. These changes must be applied before client implements their Norcom Solutions Group hosted telephony solution.
2. If you are experienced with business class firewalls and routers, please have your IT staff/contractor perform these changes for you.
3. Please read this entire document before attempting to make any changes.
4. If you have questions about this document, you can call 877-667-2661 to schedule an appointment with one of our firewall support specialists. We will attempt schedule your appointment within 24- 48 hours of your call to us so please allow adequate time.
5. After changes are completed please let your client or Norcom Solutions Group Customer Support specialist know.
6. Once completed, a Norcom Solutions Group technician will be requesting access or a collaborative web session to verify settings prior to customer cut over.

Introduction

This document is for IT administrators and illustrates configuration changes required on Cradlepoint firewall & router appliances to support Norcom Solutions Group's cloud communications telecommunications platform. This document assumes a basic network deployment consisting of one internal LAN network containing the IP phones and one WAN network connected to the Internet. While we strongly recommend a dedicated network for VoIP traffic, the instructions below can be used for a "converged" network whereby both VoIP and non-VoIP traffic share one physical WAN network. With basic modifications (such as adding access rules for additional interfaces); this configuration can be extrapolated for other network layouts. The screenshots below may vary slightly from what is displayed while configuring the device depending on model and OS software version. Setting values not mentioned may be left at default or changed as required for specific purposes.

Please call Norcom Solutions Group Customer Support at 877-667-2661 if you need any further information. Firewall changes can be in depth and you will need to schedule time with one of our specialists if you need assistance.

Screenshots and instructions are based on ***Cradlepoint IBR600 running v6.0.1.***

We recommend loading the latest Cradlepoint OS (firmware).

Firewall Checklist

After applying the configuration settings in this document, please take the appropriate screen shots to provide the firewall “verification” to Norcom Solutions Group.

The screen shots needed from the Cradlepoint GUI are listed in the below table:



Screen Shot #:	Configuration:	Completed:
1	Security → Options (SIP disabled)	
2	Networking → QoS → WAN Profile	
3	Networking → QoS → Queue	
4	Networking → QoS → Rules	

Disable SIP ALG

SIP ALG is used to try and avoid configuring Static NAT on a router. Its implementation, however, varies from one router to another, often making it difficult to inter-operate a router with SIP ALG enabled with a PBX. In general, you would want to disable SIP ALG and configure one to one port mapping on the router.

Note: Cradlepoint firewalls typically have SIP ALG disabled. Please verify this setting and disable if needed.

Security → Zone Firewall → Options

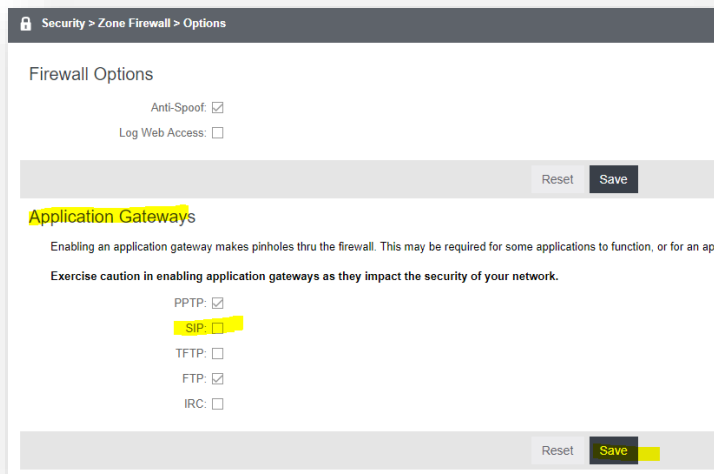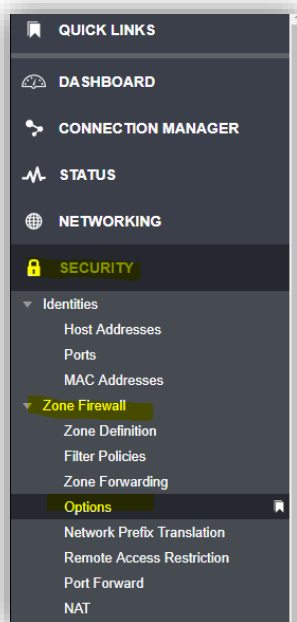

- Ensure SIP ALG is “unchecked”
- Click Save


QoS - Shaping & Priority

The Traffic Shaper will allow a defined set of traffic to a particular priority (QoS) level and guarantee/shape need bandwidth with the VoIP traffic.

Below is assuming only an Ethernet handoff is being used for ISP demark.

Networking → QoS


WAN PROFILE SPEEDS:

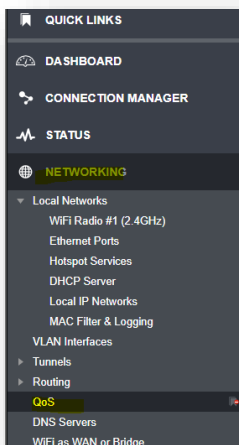

WAN Profile Speeds

Profile Name	Upload Bandwidth	Download Bandwidth
Ethernet	40000 Kb/s	40000 Kb/s
WiFi as WAN	10000 Kb/s	10000 Kb/s
LTE-only Modems	25000 Kb/s	25000 Kb/s
LTE/3G Multi-mode Modems	25000 Kb/s	25000 Kb/s
3G-only Modems	1300 Kb/s	1300 Kb/s
Ethernet-wan	5000 Kb/s	25000 Kb/s

- Edit the WAN Profile Speeds:
 - Highlight the Ethernet-Wan profile
 - Click "Edit"
 - Enter your contracted internet speed for upload and download
 - Please note that the speed is in Kb/s, examples shown below:
 - 1mbps = 1000Kb/s
 - 25mbps = 25000Kb/s
 - Click Save

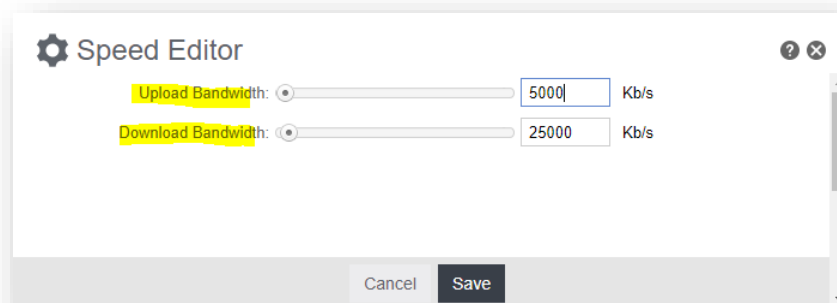

Networking → QoS


QUEUES:



- Create a new Queue
 - Click the “Add” button and enter the following information:

Queue Name:	Crexendo Traffic
DSCP (DffServ):	45
Enable Upload QoS:	Checked
Upload Bandwidth:	Set to the % you would like to dedicate to VoIP traffic
Upload Priority:	Highest
Enable Download QoS:	Checked
Download Bandwidth:	Set to the % you would like to dedicate to VoIP traffic
Download Priority:	Highest

- Click Save

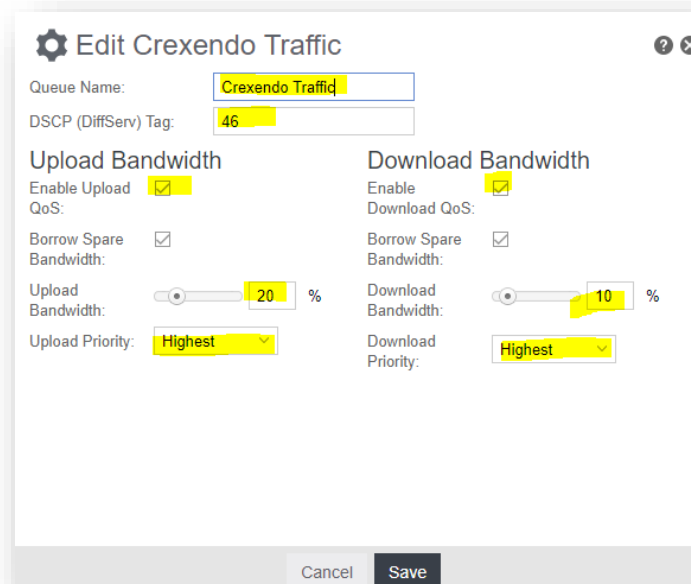

- Note: Typically we calculate how approximately much bandwidth by the following formula:
 - 100Kbps x (# of phones per site) = bandwidth needed each direction
 - I.E. 100Kbps x 10phones= 1000Kbps (or 1Mbps)

Networking → QoS

RULES:

Rules

+ Add
✎ Edit
✕ Remove

- Create a new Rule
 - Click the “Add” button and enter the following information:
 - Click Next

Rule Name:	Crexendo
Protocol:	TCP/UDP
Queue Name:	Crexendo Traffic (created in previous step)

⚙ Add Crexendo
?
✕

Rule Enabled: ☒

Rule Name:

IP Version:

Protocol:

Queue Name:

- Leave fields default except fields below:

Destination IPv4:	184.178.213.0
Destination Netmask:	255.255.255.0

- Click Finish

⚙ Add Crexendo
?
✕

Describe the network or server on the Internet for which you want to shape traffic.

NOTE: Leaving a field empty will match any IP address and/or port number. All fields are optional.

Source Port(s): ->

Source IPv4 Address:

Source Netmask:

Destination Port(s): ->

Destination IPv4 Address:

Destination Netmask:

DSCP (DiffServ):

DSCP Negate: ☐

2 of 2
 Back
Finish

Document Revision History

Version	Reason for Change	Date
1.0 Draft	Initial Draft Document	March 1, 2018
